

WEMCO®

Non-Clog Pumps

**Designed to simplify maintenance and
reduce life-cycle costs**

Excellent
Power & Industrial
Solutions



WEMCO® Non-Clog Pumps

WEMCO Non-Clog Pumps

- The WEMCO Non-Clog pump was developed using advanced technology to simplify maintenance, minimize operating costs and maximize reliability.

Rugged and Dependable

The WEMCO Non-Clog pumps were designed and developed using advanced technology to meet demanding market requirements. The WEMCO Non-Clog was created by the same engineers and manufactured side-by-side with the dependable WEMCO and WEMCO-Hidrostral pumps you already have in service - the WEMCO Non-Clog is just as rugged and dependable. Its what you expect from WEMCO.

The WEMCO Non-Clog design is an improved, modern design over conventional non-clog pumps in the market place. The WEMCO Non-Clog is designed to maintain high hydraulic efficiencies with the ability to handle large solids. The WEMCO Non-Clog was designed with the latest 3D computer aided design technology to improve overall pump efficiencies and reduce maintenance and operating costs.

Benefits


- Improved Performance
- Lower Cost
- Easy Maintenance
- Extended Operational Life
- Larger clean-out port
- Combined bearing frame and bracket to increase rigidity and reliability.

Capabilities

- Flow: up to 10,000 GPM / 2,270 M³/hr
- Head: up to 260 ft. / 80 m
- Maximum Solid Sphere: 3 inch / 75 mm
- Available in horizontal, vertical, or trailer/skid mounted configuration
- Optional Weir Prime Assist available for trailer/skid mounted units

Applications

- Sewage Lift Stations
- Return Activated Sludge
- Waste Activated Sludge
- Sewage Bypass
- Dewatering
- Digesters
- Water Booster
- Manure
- Industrial Waste
- Light Abrasives
- Agricultural Waste
- Mining
- Trailer/skid mounted with Weir Prime Assist

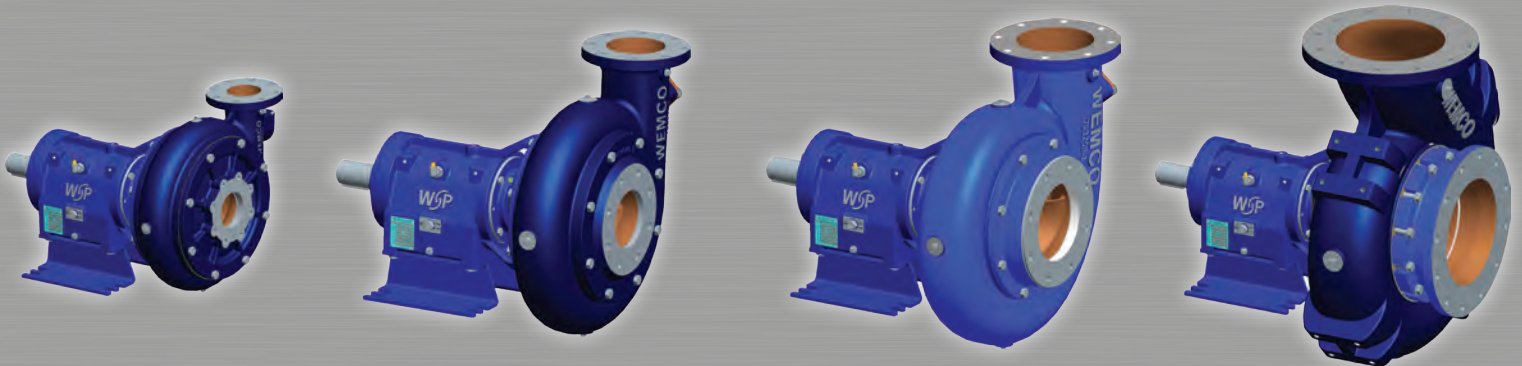

4"/100 mm

Head to: 225 ft. • 69 M
Flow to: 1300 GPM • 295 M³/hr
Solids size: 3 inch • 75 mm

6"/150 mm

Head to: 260 ft. • 79 M
Flow to: 3200 GPM • 726 M³/hr
Solids size: 3 inch • 75 mm

8"/200 mm

Head to: 240 ft. • 73 M
Flow to: 5000 GPM • 1135 M³/hr
Solids size: 3 inch • 75 mm

12"/305 mm

Head to: 190 ft. • 58 M
Flow to: 10,000 GPM • 2,270 M³/hr
Solids size: 3 inch • 75 mm

Springer Pumps, LLC

Tel: 866-777-6060

Fax: 866-777-6383


info@springerpumps.com

www.springerpumps.com

WEMCO® Non-Clog Pumps

WEMCO Non-Clog Pumps

- The WEMCO Non-Clog pump was designed to maintain high hydraulic efficiencies with the ability the handle large solids.

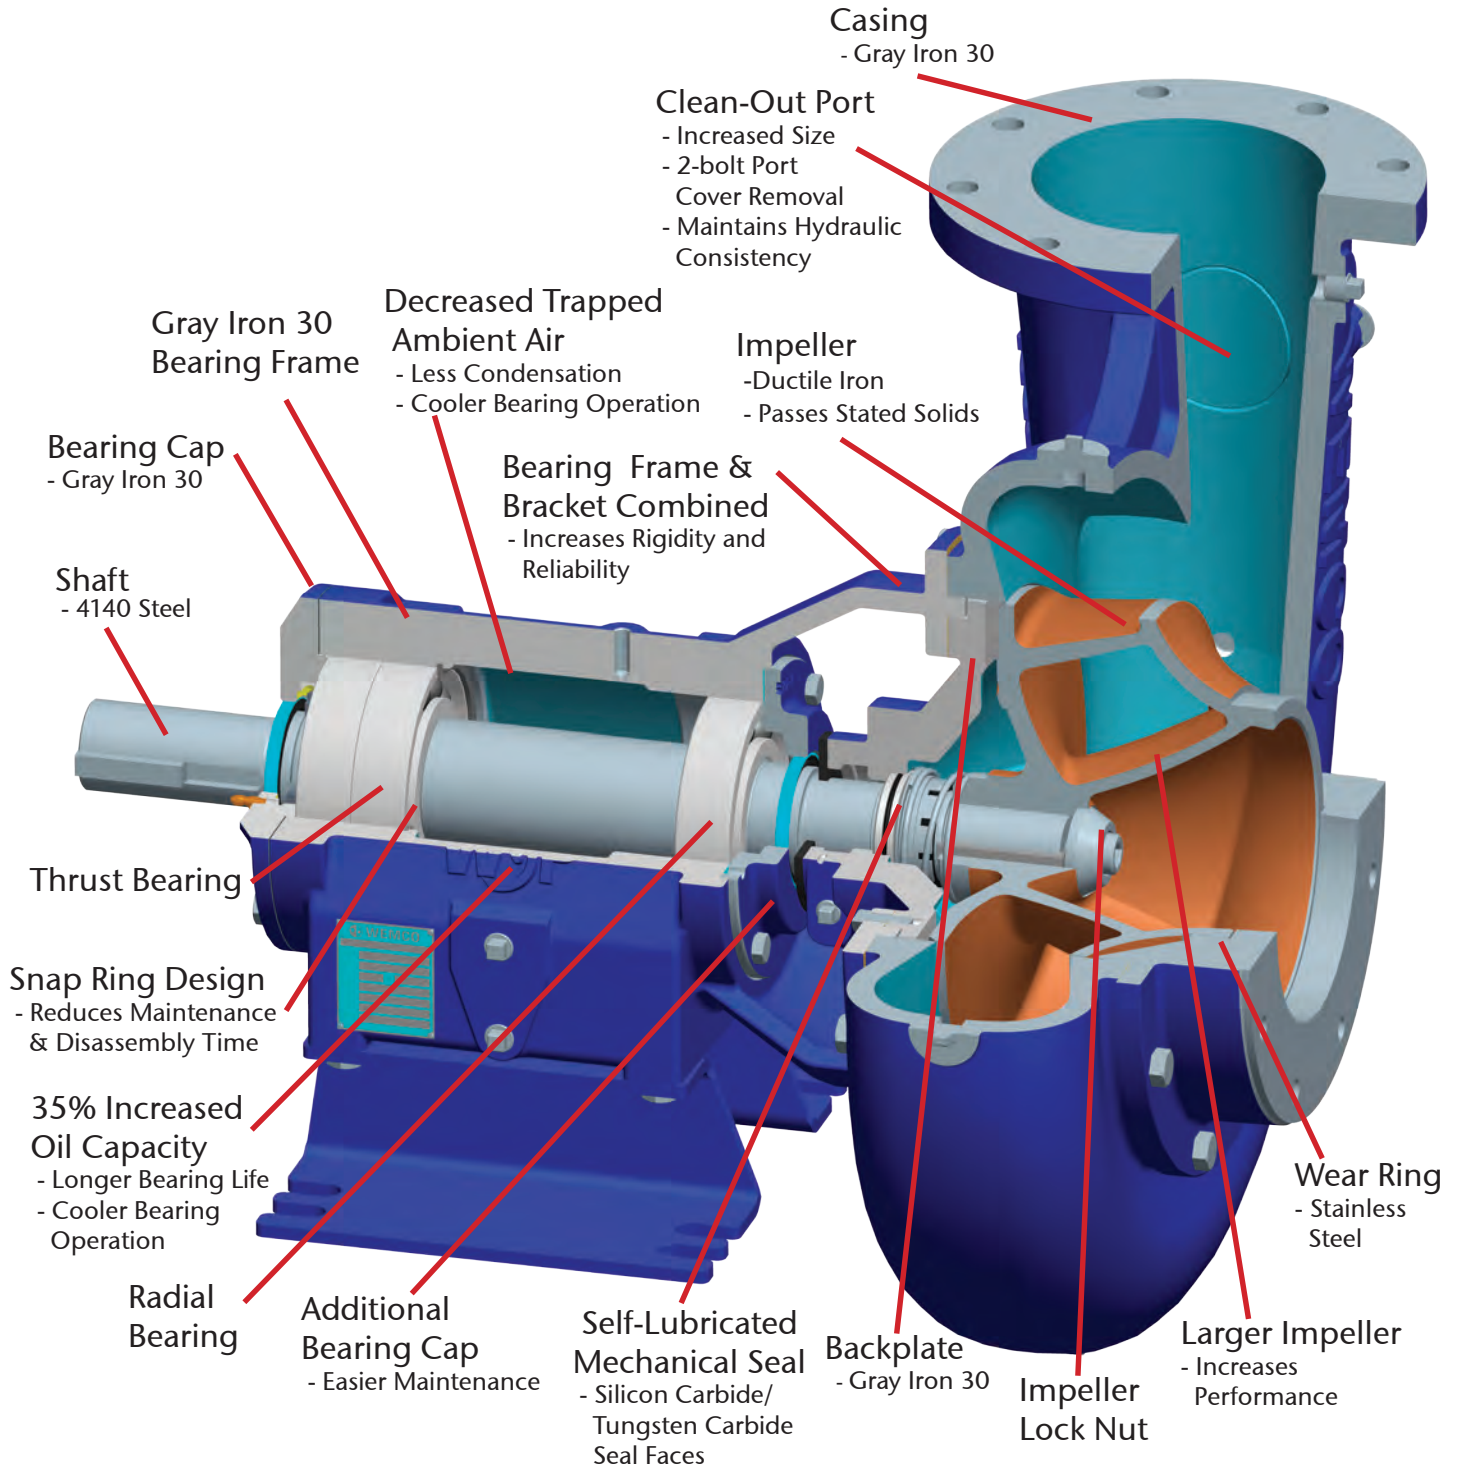

Springer Pumps, LLC

Tel: 866-777-6060


Fax: 866-777-6383

info@springerpumps.com

www.springerpumps.com

WEMCO® Non-Clog Pumps

WEMCO Non-Clog Performance Chart

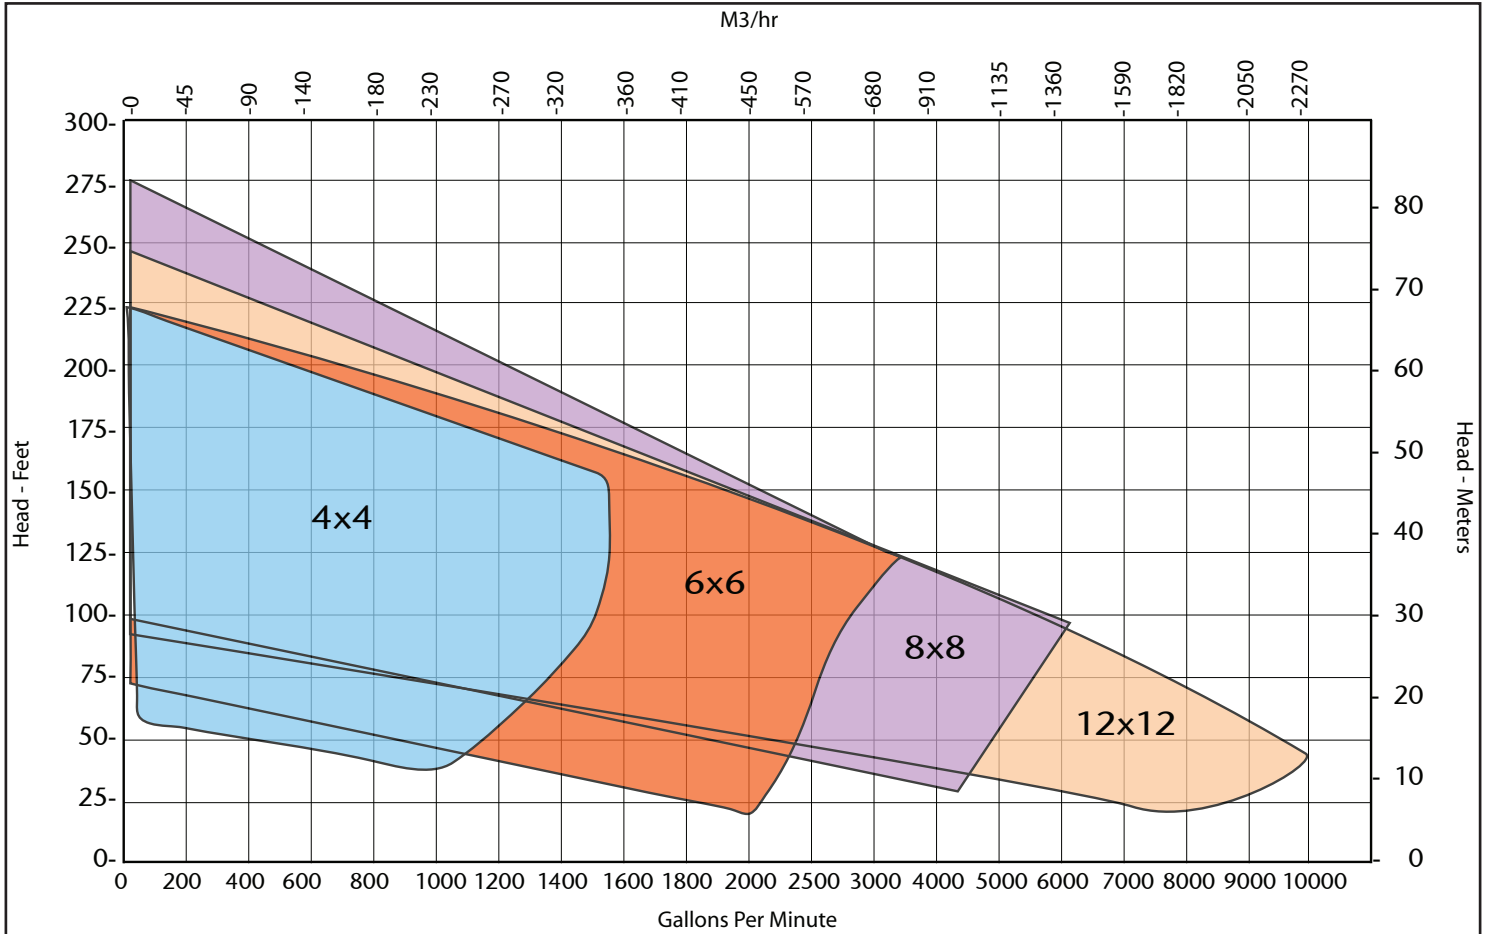

Springer Pumps, LLC

Tel: 866-777-6060 Fax: 866-777-6383 info@springerpumps.com www.springerpumps.com

Weir Specialty Pumps

440 West 800 South
P.O. Box 209 (84110-0209)
Salt Lake City, UT 84101
USA
Tel: 801 359 8731
Fax: 801 530 7828
email: info@weirsp.com
www.weirsp.com

Excellent
Power & Industrial
Solutions

