

Discover

SANDPIPER®

A WARREN RUPP PUMP BRAND


Pumping
Solutions

Non-Clog Wastewater Flap Valve

Air-Operated Double Diaphragm Pumps


FEATURES:

- ESADS+Plus® (Externally Serviceable Air Distribution System)
- All Bolted Construction
- Flap Check Valves
- Thick Wall Construction
- Solids Range +1" to 3"
- 90° - 180° Manifold Connection Rotation
- Free Standing Support Base
- Bottom Discharge
- Heavy Duty Extended Wear Package
- Durable Diaphragm Connecting Rod
- Dry Primes up to 24 ft of Water

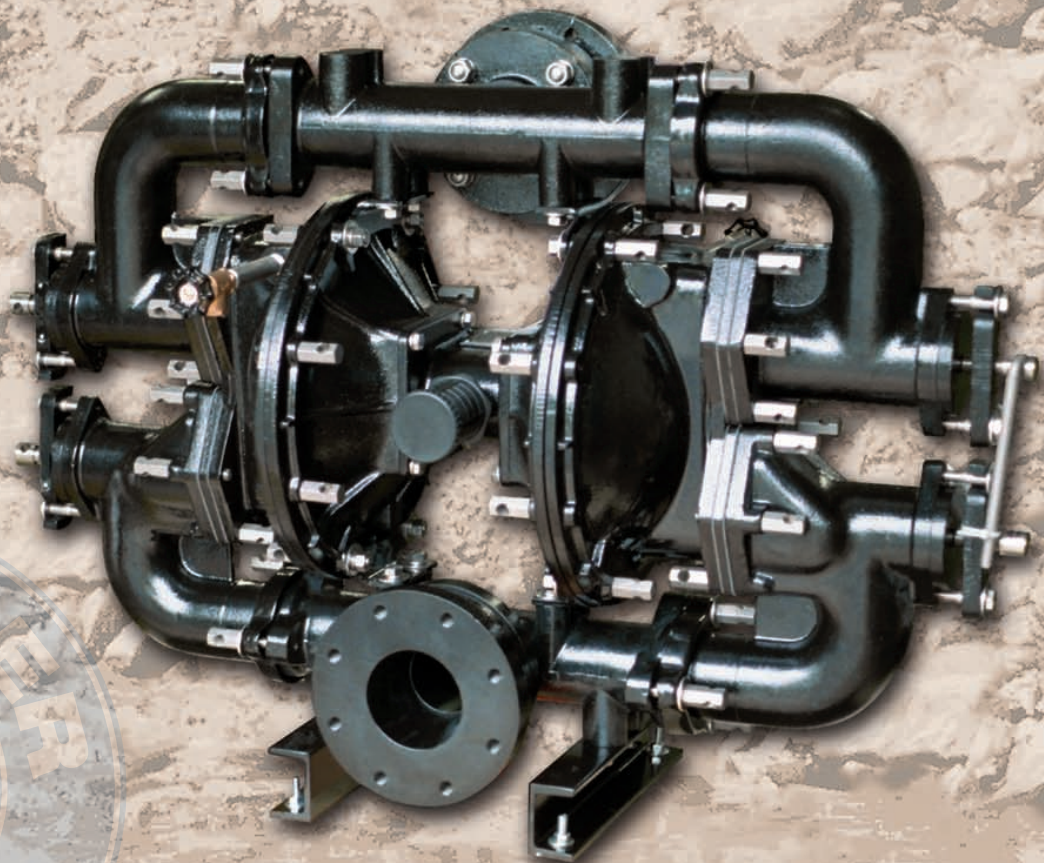


Visit our website to learn more about our Non-Clog Wastewater Products
www.warrenrupp.com

Non-Clog Wastewater Flap Valve Pumps


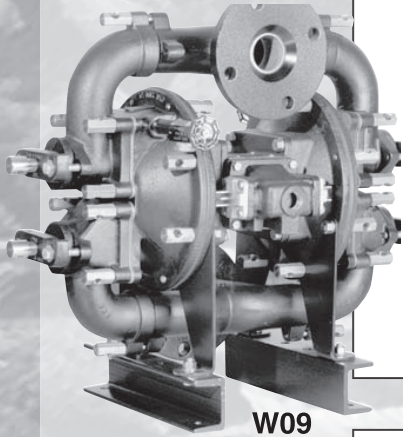


W09


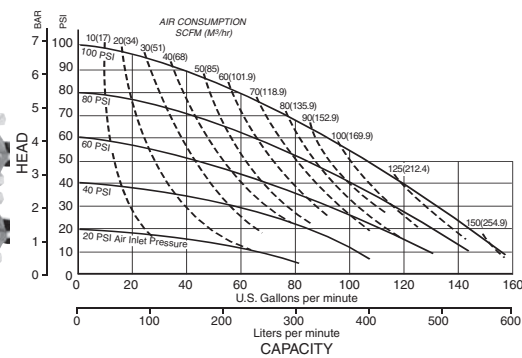


MODEL W09 Performance Curve

MODEL W15 Performance Curve

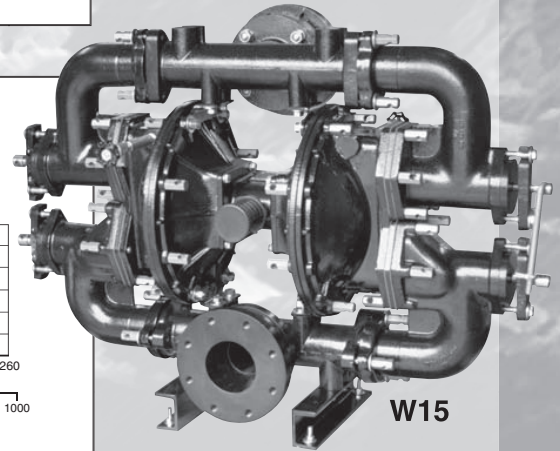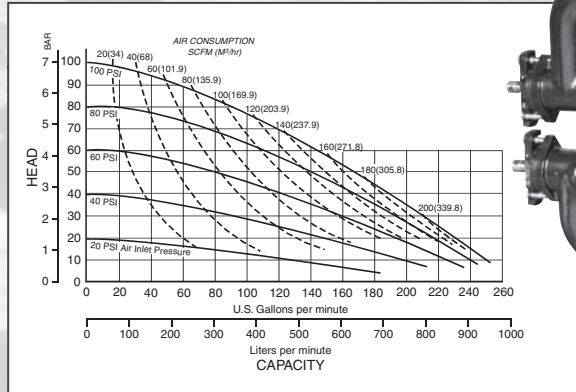

W15

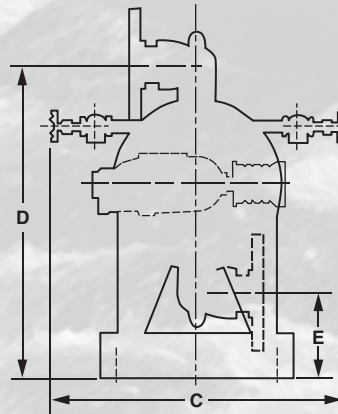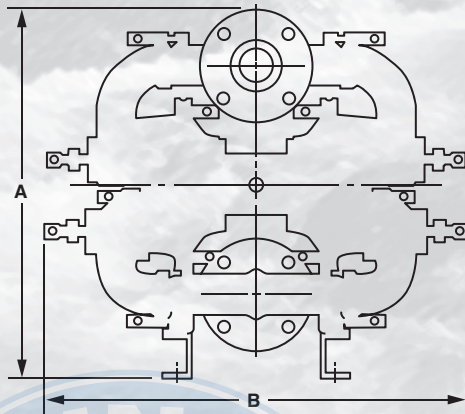

Non-Clog Wastewater Pumps

are fitted with swing check valves and easy access clean-outs. The pumps are designed specifically for slurry and solids-laden materials. Flap valves allow passage of suspended, pipe-sized solids and stringy material. Constructed of cast iron with a durable epoxy coating inside and out.

PUMP MODELS	A	B	C	D	E	Connection Style	Pipe Size	Displacement Per Stroke	Max Flow Per Minute	Max Solids Handling	Max Discharge Pressure
	Height	Width	Depth	Bottom of Base to Center Line of: Suction Discharge							
	inches (mm)	inches (mm)	inches (mm)	inches (mm)	inches (mm)						
W09-2	23 3/4 (608)	28 1/4 (724)	19 3/4 (506)	20 3/4 (531)	5 5/8 (144)	2" 125# ANSI	2 (50)	.43 (1.60)	140 (530)	2 (50)	125 (8.6)
W09-3	24 1/2 (627)	28 1/4 (724)	19 3/4 (506)	20 3/4 (531)	5 5/8 (144)	3" 125# ANSI	3 (80)	.43 (1.60)	140 (530)	2 (50)	125 (8.6)
W15-3	31 1/2 (800)	44 1/2 (1130)	21 1/2 (546)	27 3/4 (705)	6 (152)	3" 125# ANSI	3 (80)	1.23 (4.66)	260 (988)	3 (76)	125 (8.6)
W15-4	32 1/4 (819)	44 1/2 (1130)	21 1/2 (546)	27 3/4 (705)	6 (152)	4" 125# ANSI	4 (100)	1.23 (4.66)	260 (988)	3 (76)	125 (8.6)

All Dimensions +/- 1/8 (3)